

Con Anima




Quotation: Stereo 09.2004

Die kleine Lua- Standbox ist ein Ausnahmelautsprecher, ein Präzisions- und Abbildungswunder mit enormem Wirkungsgrad, Feingeist und edelster Verarbeitung. Top!


Standard version 2.792 € /Pair, stainless steel front panel and 162 other veneers for extra charge available.

Review Stereo 09.2004




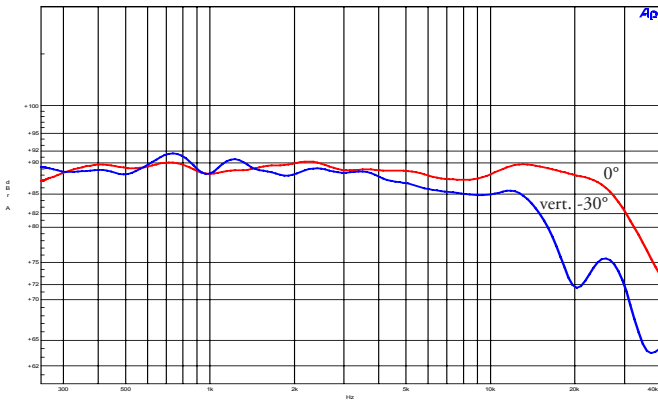


Frequency- response: -30° out of axe vertical, very linear

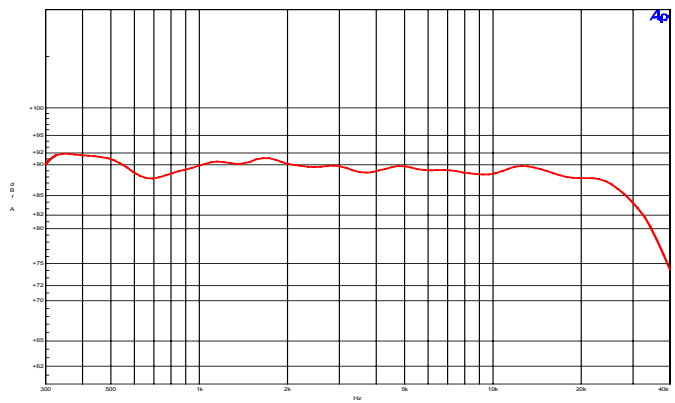

Frequency- response: $\leq \pm 1,5$ dB: Mid- high range

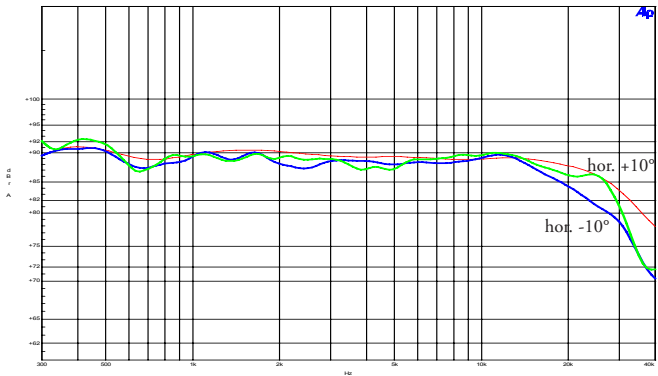

Frequency response: -10° hor. out of axe, nearly no interferences

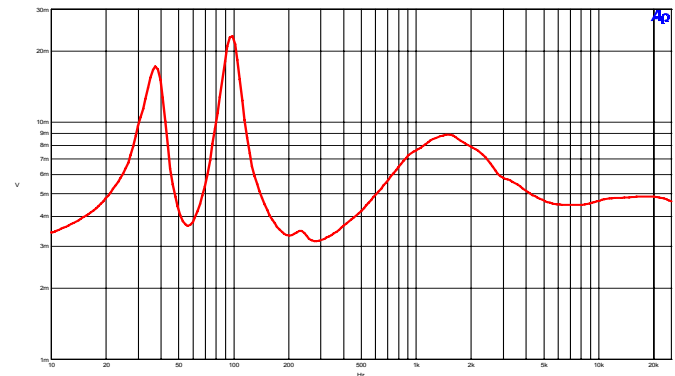

Loudspeaker: Impedance curve, min. 3,2 Ω

Description:

Nearly 12 years the earlier version of our Con Anima, the 5/3 D was sold successful to the market. People liked their small size and the outstanding sound reproduction in view of the small cabinet. To top this excellent speaker was not an easy business. Their first was the problem of the very difficult manufacturing procedure of the cabinet. This cabinet was developed to minimize all resonances a cabinet can create. By the success we have had with our Con Espressione, we tried to integrate the same technology into the small size of our new Con Anima. And indeed we have been successful again. Out of 18 ltrs. volume net only, the two small 130 mm speaker make a frequency response down to 50 Hz - 3 dB, but with 90 dB sensitivity, measured 1 W/1metre/ 2 V load. The high sensitivity and the perfect impedance make it possible to take this outstanding loudspeaker to every type of amplifier, also to small ones. With the powerful dynamic, also down to deep ranges, you require a loudspeaker, which will fulfil most of the demands you may have to perfect loudspeaker in view of its small size. For people who try to find the best small loudspeaker the Con Anima is first choose.

Technical Data:

- Principle:** 2- way Bassreflex, optimised damping
- Recommended installation:** stereo base distance between 2- 3 Metres, 5-10° angled to innerside, optimised up to 0,3- 1Metre from side walls and 0,30 - 1Metre from rear wall, to save the excellent deepness- staggering of the speaker.
- Quantity and type of chassis:**
2 woofer- midrange system: 130 mm, cone PP.- CF.
1 tweeter: 25 mm, low mass fabric dome APC. 2 system
- Cross- over network:** Filter 2.Order/ Butterworth
- Split- frequencies:** 180 Hz / 2.300 Hz.
- Cross- volume:** 31 Litres (net. 18 ltrs.)
- Frequency range:** 42 - 30.000 Hz DIN 45 500
- Frequency response:** (-3 dB) 50 Hz - 26.000 Hz
- Power handling nominal/ music:** 40 Watt (IEC 268- 5)
- Peak power handling:** 60 Watt
- Sensitivity:** 90 dB/1Watt/1Metre
- Recommended power amplifier handling:** up to 120 W/Sin. by linear tone control and ½ rms./ power
- Nominal impedance:** (amplifiers with 2/4/8 Ohms stability are optimised)
- Dimensions:** (W x H x D) 183 x 97,5 x 230 mm, socket board (W x D) 220 x 250 mm
- Net- weight:** 15,5 kgs
- Warranty:** 5 years for first owner
- Available veneers:** about 160 + colouring versions, ask your dealer for details.

All alterations are reserved at every time and without any notice and information for change of the actual data of this brochure.

